


Download technical information, 2D and 3D product drawings, product certification and view product videos all in one place.

DATASHEET =

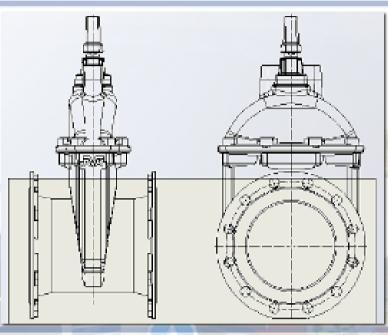

Easily click and compare products and find out which product will work best for you.

> फोत Compare Enquiry

## COMPARE PRODUCTS 😒



	\$
le	Flanged Ends, PUR Coated, St St Spindle, GIS/V7-1

DONKIN CAST IRON SOFTSEAL VALVE, PN7

Connection	Flanged	Flanged	
Material	Cast Iron	Cast Iron	
DN range	DN80 - DN300	DN80 - DN300	
PN classification	PN 7	PN 7	
Closing direction	Clockwise to Close	Clockwise to Close	
Standards	Designed according to GIS-V7 Part 1 Face to face according to EN 568 table 3 basic peries 3 Standard flange drilling to EN1092 (ISO 7005-2), PN 16	Designed according to BGE/S/V/3, Designed according to BN 12266, Designed according to GIN/7 Part 1, Designed according to MSS SP- 70 Face to face according to EN 558 table 3 basic series 3 Standard fange dilling to EN1092, (ISO 7005-2), PN 16	
Test/approvals	Tested according to EN12266-1	Approved according to GIS/V7 Part 1	
	×	×	



If there's something you're unsure about, don't hesitate to contact one of our dedicated product experts directly on product pages.



Greg Morris TECHNICAL MANAGER -WATER PROJECTS

A +44 (0)7810 377246 Send e-mail



Jon Briafield MARKET SECTOR MANAGER - GAS

A +44 (0) 7879 441413 Send e-mail









Stay up to date with the latest news and articles from AVK in the UK and access our downloadable brochures. For more information follow us on Twitter and LinkedIn!



## **@AVK UK Ltd**